LandAirSea Sync

OBD-II Port Powered, Real Time Inventory
Management Device and GPS Tracker

The LandAirSea SYNC device is a 4G LTE GPS tracking device that plugs into your vehicle's OBD II port. This reliable device can help protect your assets, monitor your teen drivers, understand where your elderly parents are driving and even manage your fleet or business vehicles. This device doesn't connect to the vehicle's complicated computer system, but instead draws a small amount of power from your battery to ensure accuracy and consistent tracking behavior. Receive notification alerts, speeding alarms, generate historical reports, see traffic, and view the device(s) on clear Google map both on a desktop and mobile Apps.

LandAirSea® Asset Protection

©2021 LandAirSea Systems, Inc. All rights reserved including use of LandAirSea name, logo, slogans and trademarks. All other trademarks and service marks are the property of their owners.

SPECIFICATIONS

WIRELESS COMMUNICATION

Multi-Mode	4G LTE CAT M1 / 4G LTE CAT NB1 / EGPRS (2G)
Global Bands	Cat M1/NB1: B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B26/B28/B39 EGPRS: 850/900/1800/1900 MHz
Region	Global
Carrier Certifications	Vodafone / Deutsche Telekom / Telefónica / Verizon / AT&T / T-Mobile / Sprint / U.S. Cellular / Rogers / Telus / KT / SKT / LGU+ / NTT DOCOMO / SoftBank / KDDI / Telstra
Regulatory Certifications	GCF / CE / FCC / PTCRB / IC / Anatel / IFETEL / CCC / KC / NCC / JATE / TELEC / RCM / NBTC / IMDA

LOCATION SERVICES

GNSS	GPS / GLONASS / BeiDou-Compass / Galileo / QZSS
Assisted GNSS	Online

FEATURES

Extremely powerful GNSS and Cellular Antennas designed for non-ideal conditions
Permanent Power Connection (OBD-II). Extension cable available
Device tamper detection
Selectable real time location updates as fast as every 2 seconds
ShareSpot (Share the device location via text or email to anyone easily)
InstaFence (Instant notification if the asset leaves the current location)
Dark Mode (Remotely turn all LED's off)
Historical Playback (Bread crumbs)
Full API catalog for customized system integration
Auxiliary cable available for Engine Start Interrupt

LandAirSea® Asset Protection

©2021 LandAirSea Systems, Inc. All rights reserved including use of LandAirSea name, logo, slogans and trademarks. All other trademarks and service marks are the property of their owners.

ENVIRONMENTAL DATA

Operational temperature	-40° C to 60° C
Storage temperature	-40° C to 60° C
Humidity	< 95% non-condensing
Drop	3 feet onto concrete
Sealing	Waterproof to IP67 standards
RoHS compliant (lead-free)	
Green (halogen-free)	

Power

Voltage Input	8V to 30V
Internal Battery	Li-Ion rechargable, 3.7, 250mAh

INDICATOR / BUTTONS

LED	3 LED programmable (Battery, LTE Connectivity, GPS)
Reset Button	Touch Pin Sensitive

PHYSICAL CHARACTERISTICS

Grade	Industrial
Dimensions	W: 1.7 in. D: 2.2 in. H: 1.0 in.

LandAirSea® Asset Protection

©2021 LandAirSea Systems, Inc. All rights reserved including use of LandAirSea name, logo, slogans and trademarks. All other trademarks and service marks are the property of their owners.

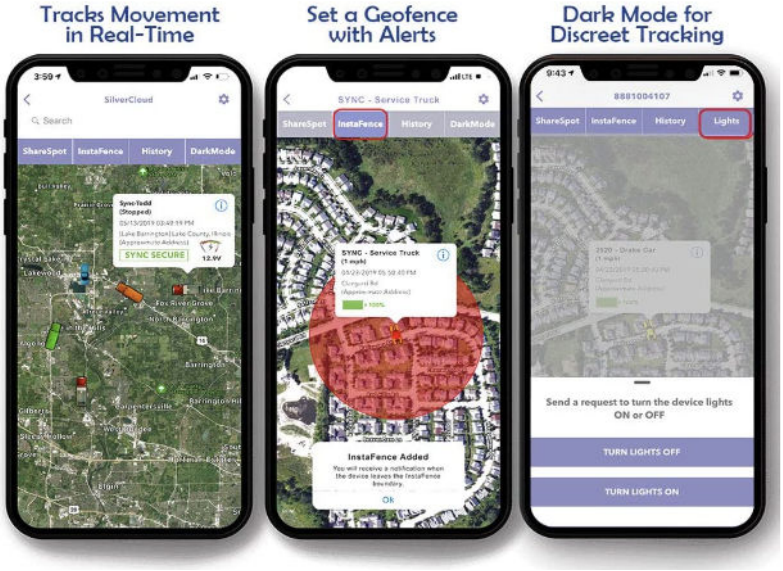

LandAirSea® Asset Protection

©2021 LandAirSea Systems, Inc. All rights reserved including use of LandAirSea name, logo, slogans and trademarks. All other trademarks and service marks are the property of their owners.